
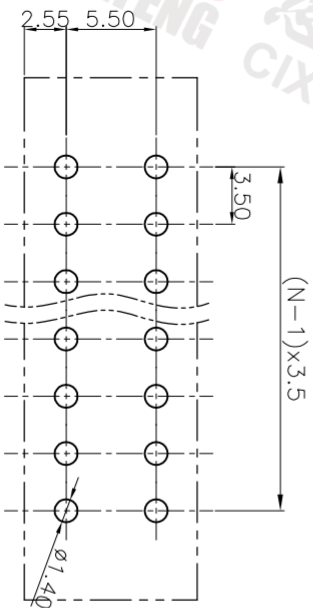

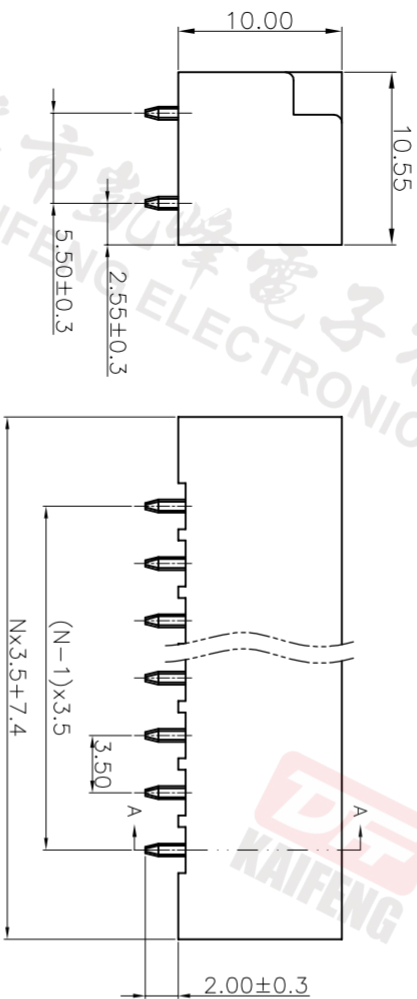


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
V1.0	DWG.REL	2023.7.28	ZHANG	JIN

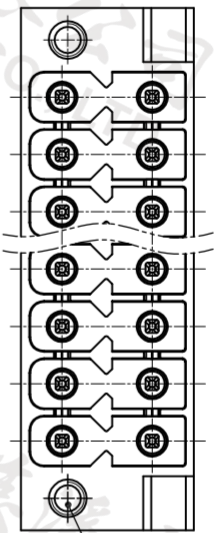


- Material
①Housing : PA9T, UL94V-0
②Pin header : Copper alloy,Tin plated
③Nut : M2.0 Steel,Zinc plated

- Electrical UL IEC
Rated voltage : 300V 250V
Rated current : 8A 8A
Contact resistance : 20mΩ(Max)
Insulation resistance: 500MΩ/DC500V
Withstanding Voltage : AC2000V/1min

- Mechanical
Operating temperature: -40℃~+130℃
Soldering temperature:250℃±5/5sec

- Conform to REACH and RoHS

HOW TO ORDER
2KF014RM-3.5-2*XXP-1 X-XXXXX

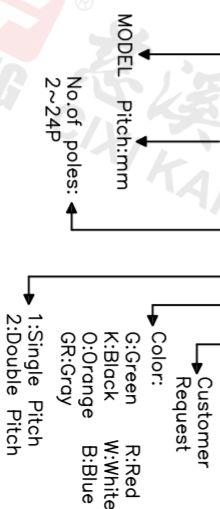

Pitch range	Nominal dimension range					—	∩	□	PROJECTION	UNIT	TITLE
>0	>6	>10	>0	>30	>60	>100			mm	2KF014VM-3.5-2*XXP-1X	
~	~	~	~	~	~	>150					
6	10	24	30	60	100	150	∠		A4	SERIES 2KF014VM	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°			
DRAWING TYPE	CUSTOMER DRAWING										
SCALE	1:1	SHEET		1/1							
DRAWING NO.	W10004822										
 慈溪市凯峰电子有限公司 CIXI KAIFENG ELECTRONICS CO.,LTD											

慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD